



Opel Vivaro & Zafira Life TREK

3 versions: Small, Medium & Large
Engine: Diesel 2.0 120 HP and 2.0 150 HP
 Manual gearbox

Not compatible options: Vivaro Combi, automatic gearbox, original Opel tow bar, diesel 1.5 100 hp, 1.5 120 hp and 2.0 180 hp engines

The Trek solution:

- **RELIABLE :** with the Vivaro / Zafira lifeTrek and its 4 cm raised body, difficult terrains aren't difficult anymore!
- **ITS ASSETS :** on road as well as tough terrain, it progresses in an efficient way (forest, mountain, etc). The Vivaro / Zafira life Trek ensures a very good road holding and provides a remarkable mobility for a two wheel drive vehicle thanks to an under-engine protection plate and a motricity optimization system on difficult terrain : the Intelligrip (5 versions available according to ground type).
- **SIMPLE & ELEGANT :** resulting from its raised suspensions, the Vivaro / Zafira life Trek dominates difficult terrain and allows safe and comfortable driving on regular roads without the driver having to intervene.
- **ECONOMIC :** the Vivaro / Zafira lifeTrek is a 100% mechanical development with parts which don't require specific maintenance which means an economic vehicle!

Warranty and maintenance:

2 years (unlimited mileage)
 Service intervals as per base vehicle.

Mandatory options :

Vivaro : Intelligrip (xxxxx) and Rough Road Package (xxxxx)
 Zafira Life : "Motricity pack" (xxxxxxxx)

Ref : 03 O V61 01 EN 2020 02


Avantages

- ✓ 40 mm raised suspension
- ✓ Low CO² emissions and fuel consumption
- ✓ Comfort
- ✓ Crossing capacities on tough terrain
- ✓ Under body protections

Useful information

Dangel Conversion lead-time:
 5 weeks (after vehicle reception // transport excluded)

EU Type approval e2*2007/46
 2nd step COC for each vehicle

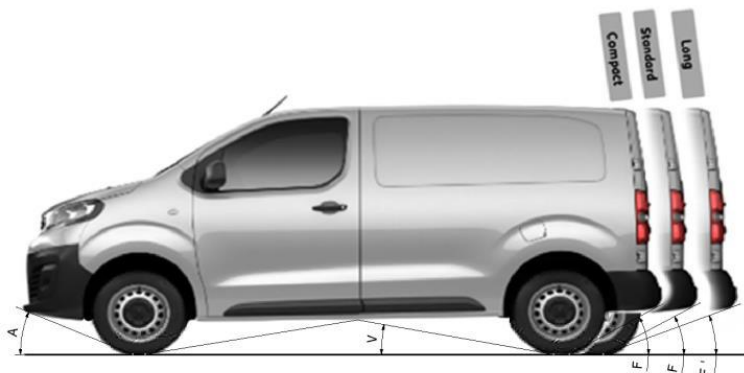


Unloaded off-road values

	Front angle (A)	Central angle (V)	Rear angle (F)
XS	23.2°	23.4°*	23.2°
L	23.2°	20.8°**	23.2°
XL	23.2°	20.8°**	23.2°

* : (11.7° x 2)

** : (10.4° x 2)

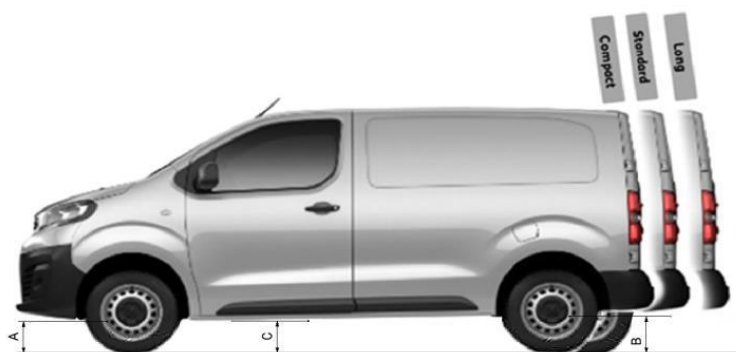

Unloaded ground clearance (*)

Under engine skid plate (A)

190 à 200 mm

Under rear axle (B)

260 à 270 mm

Under body (C)

275 à 285 mm

* : These values are given for information purposes only. They may vary depending on the vehicle equipment.